

Injection Pumps

WEBAC® Piston Pumps

Hand pumps

WEBAC® HP 100 CE



- For injecting PU injection foam resins, PU combi injection resins, PU injection resins and epoxy injection resins
- Delivery rate approx. 35 cm³/stroke
- Up to 100 bar injection pressure
- Low weight and easy handling on site

WEBAC® HP 250 CE




- For injecting PU injection foam resins, PU combi injection resins, PU injection resins and epoxy injection resins
- Delivery rate approx. 10 cm³/stroke
- Up to 250 bar injection pressure
- Low weight and easy handling on site

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

High-pressure electrical pump

WEBAC® HEP 1001 CE

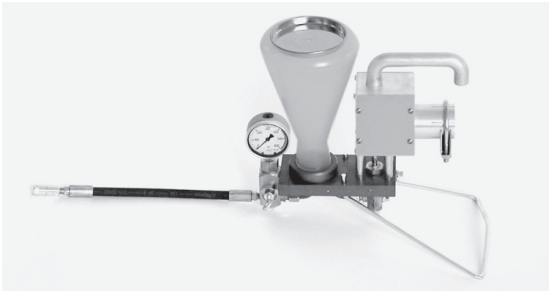

- Entry-level model
- For injecting PU injection foam resins, PU combi injection resins, PU injection resins and epoxy injection resins
- Delivery rate approx. 30 l/h
- Up to 400 bar injection pressure
- Low weight and easy handling on site

Hand pump (2C-double-piston)

WEBAC® HP 50 2K CE



- For injecting **WEBAC® 2260** at mixing ratio 1 : 1
- Delivery rate approx. 48 ml/stroke

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 03/17

Injection Pumps

WEBAC® Piston Pumps



Operation

For the operation of the injection pump, see the pump manual.



Cleaning

- Clean the injection pump with **WEBAC® Cleaner A**
- Observe the technical data sheets of the cleaner used
- Refer to the operating manual of the injection pump for detailed information




Storage

- Always store the injection pump in an upright position
- Fill the cleaned pump system with (water-free) hydraulic oil in case of long non-operating periods

Occupational safety/waste disposal

► Downloads on webac-grouts.com



[webac-grouts.com/
downloads](http://webac-grouts.com/downloads)

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Overview: Range of application

| | Sealing of Masonry | Gel Injection (Curtain Injection) | Stabilization of Structures | Crack Repair | Sealing of Joints | Monument Conservation | Sealing of Foundation Pits | Sewer Repair | Soil Solidification |
|-----------------|--------------------|--------------------------------------|--------------------------------|--------------|-------------------|--------------------------|-------------------------------|--------------|---------------------|
| 1C pumps | WEBAC® IP EasyPro | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ |
| | WEBAC® IP 1K-F3 | ✓ | | ✓ | ✓ | ✓ | | ✓ | ✓ |
| | WEBAC® HP 100 | ✓ | | ✓ | ✓ | ✓ | | | |
| | WEBAC® HP 250 | ✓ | | ✓ | ✓ | ✓ | | | |
| | WEBAC® HEP 1001 | ✓ | | ✓ | ✓ | ✓ | | | |
| 2C pumps | WEBAC® IP 2K-F1 | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ |
| | WEBAC® IP 2K-F2 | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ |
| | WEBAC® HP 50 2K | ✓ | | ✓ | ✓ | ✓ | | | |

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/17