

PU Injection Resins WEBAC® 1420



Range of application

- Sealing of cracks and construction joints in agricultural structures or waste water disposals
- Crack repair in drinking water tanks
- Damp proof course (dpc) in masonry
- Connection joints of precast unit elements
- Joints of cast in-situ concrete/precast units
- Separation joints in buildings


Properties

- Polyurethan-based injection resin
- High chemical resistance also to biogenic sulfuric acid
- Highly flexible
- Quick-seal foam upon contact with water
- Compatible with bitumen
- Total solid*


Test certificates

- Test certificate according to KTW-BWGL recommendations: sealants, lubricants
- Environmental Product Declaration (EPD)
- List of chemical resistance

Examples

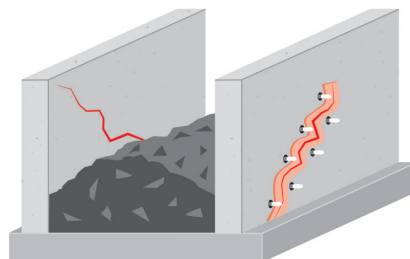

Crack repair in
manure reservoirs



Crack repair in
drinking water tanks

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

*according to test method by Deutsche Bauchemie e.V. (German Industry Association for Manufacturers of Construction Chemicals)

PU Injection Resins **WEBAC® 1420**

Technical data	Values			
Mixing ratio	3 : 1 parts by volume			
Density, 20 °C (DIN ISO 2811)	Comp. A Comp. B	≈ 1.0 g/cm³ ≈ 1.2 g/cm³		
Pot life (WEBAC test specification based on DIN ISO 9514)		30 °C ≈ 60 min	23 °C ≈ 100 min	12 °C ≈ 100 min
Application temperature Building structure and material	> 5 °C			
Viscosity of mixture (WEBAC test specification based on DIN ISO 3219)		30 °C ≈ 220 mPa·s	23 °C ≈ 300 mPa·s	12 °C ≈ 620 mPa·s
Reaction time with 5% water Start • End • Expansion		21 °C ≈ 1 min • ≈ 4 min 30 s • ≈ 10-times		
Tear strength • Elongation at break 7 d, 21 °C (DIN ISO 527)		≈ 0.8 MPa (N/mm²) • ≈ 50%		
Shore hardness A 7 d, 21 °C (DIN EN 868)		≈ 56/48		
Watertightness (DIN EN 14068)		> 2 bar		
Fire behavior (DIN 4102-4. 2.3.2)		B2		
GISCODE		PU40		
EPD		EPD-FEI-20220021-IBG1-EN		
Exposure scenarios according to REACH		Assessment of industry standard application		

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

PU Injection Resins

WEBAC® 1420

Preparatory work

Structural analysis:

- Preparation of a building condition analysis to determine the actual condition of the structure/component
 - Structure condition
 - Hydrodynamic and hydrostatic conditions
 - Water load
 - Salt load
- Determine the necessary key figures for soil injections (soil expertise/porosity etc.)

This results in:

- Planning of suitable remediation measures in accordance with the applicable rules and standards
- Selection of suitable material
- Selection of packers/lances
- Arrangement of the boreholes and placement of the packers/lances
- Carrying out a test injection if necessary

Application instruction

- Injection by 1C pump
- Make sure the filter in the hopper is clean
- The mixture must be used completely within pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction

Mixing

- Empty component A and B at the given mixing ratio into a mixing vessel (make sure that the containers are completely empty) and mix homogenously
- Transfer mixed material in a new mixing vessel, stir well again and fill into the hopper of the pump

Application

- Adapt the injection pressure to the nature and condition of the building structure (< 10 bar for low pressure method or high pressure method starting at ≈ 20 bar)
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution
- A secondary injection must be carried out depending on the moisture condition and foam behavior

Final work and cleaning

- Once the material has cured remove the packers
- Clean the drill holes and close with suitable non-shrinking mortar
- Clean the component surface of patched cracks, grind flat if necessary
- Clean the pump with **WEBAC® Cleaner A**
- Use **WEBAC® Cleaner B** for dissolving cured material but never for flushing pumps
- Observe the technical data sheet of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump

PU Injection Resins **WEBAC® 1420**

Product data

Material consumption for post-construction damp proof course (dpc) (depending on the pore and cavity volume of the masonry)

- Thumb rule:
≈ 1 kg/m per 10 cm wall thickness
- For masonry with wall thickness > 60 cm:
≈ 1.2 kg/m per 10 cm wall thickness

Delivery form

Comp. A	Comp. B
210 kg	3 x 28.6 kg
14.85 kg	6.05 kg
10 kg	4 kg

Storage

- Between 5 °C and 30 °C
- Protected from moisture
- In original, sealed containers

Compatibility

- Compatible with masonry mortar, concrete, steel, foil, cable sheathing, metal and WEBAC injection materials

Resistance

- Resistant to salts harmful to the building, alkalis and acids in common concentrations in building structures

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac.de.

Waste disposal

In Germany, empty containers can be disposed of via "Interzero Circular Solutions Germany GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or www.webac.de and the safety data sheets.

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 06/2026