

Epoxy Coating Systems – Primers

WEBAC® 4270E CE



WEBAC®

Range of application

- Primer for dry, damp, open-pored mineral substrates
- Special primer for oily and wet substrates
- Additional barrier for oily or damp substrates as adhesive agent for coatings
- Resin screed according to DIN EN 13813
- Adhesive agent between existing and new concrete


Properties

- Epoxy-based primer
- Very low viscosity
- Compatible with oil/moisture
- Slight residual tackiness
- Resistant to frost and de-icing salt
- Total solid*

Test certificates

- Declaration of performance in accordance with the Construction Products Regulation (system 4)
- Environmental Product Declaration (EPD)
- List of chemical resistance

Examples

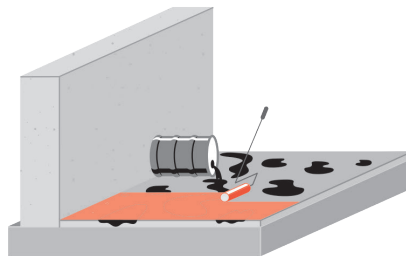

Barrier for oily substrates

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

*according to test method by Deutsche Bauchemie e.V. (German Industry Association for Manufacturers of Construction Chemicals)

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 05/2026

Epoxy Coating Systems – Primers

WEBAC® 4270E CE

WEBAC®

Technical data	Values	
Mixing ratio	3.2 : 1 parts by volume	
Density, 20 °C (DIN ISO 2811)	Comp. A	≈ 1.1 g/cm ³
	Comp. B	≈ 1.0 g/cm ³
Pot life (WEBAC test specification based on DIN ISO 9514)	21 °C ≈ 65 min	
Application temperature Building structure and material	> 8 °C	
Viscosity of mixture (WEBAC test specification based on DIN ISO 3219)	21 °C ≈ 115 mPa·s	
Adhesive strength on concrete 7 d, 21 °C (DIN EN 1542)	oily	≈ 3.3 MPa (N/mm ²)
Compressive strength 7 d, 21 °C (DIN ISO 604)	≈ 60 MPa (N/mm ²)	
Bending tensile strength 7 d, 21 °C (DIN ISO 178)	≈ 60 MPa (N/mm ²)	
CE classification (DIN EN 13813)	SR - B2.0	
Fire behavior (DIN 4102-4, 2.3.2)	B2	
GISCODE	RE30	
EPD	EPD-DBC-20220175-IBF1-EN	
Exposure scenarios according to REACH	Assessment of industry standard application	

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 05/2026

Preparatory work

Structural analysis:

- Checking the substrate
 - Moisture condition (dry, damp or wet)
 - Surface strength (> 1.5 MPa (N/mm²))
 - Concrete quality
 - Condition of the surface (dirty, oily)
- Observe dew point

This results in:

- Selection of suitable material
- Pre-treatment of the substrate if necessary

The substrate must be open-pored, dry and free of dust and oil; if necessary, pre-treat the substrate.

Application instruction

- Application by brushing, rolling, with rubber squeegee or trowel
- The mixture must be used completely within pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The pot life/curing time are influenced by the amount of material/layer thickness and the temperature of the material/building structure – higher temperatures accelerate, lower temperatures slow down the reaction
- Observe Dew Point Table (the substrate temperature must be 3 °C above dew point temperature to avoid condensation)

Mixing

- Empty component A and B at the given mixing ratio into a mixing vessel (make sure that the containers are completely empty) and mix homogenously
- Transfer mixed material to another clean mixing vessel and stir briefly

Application

Primer

- Apply the primer to the substrate by brush, roller or rubber squeegee
- Apply the material evenly covering the entire surface in one or several operations (depending on the substrate's absorbency) avoiding puddle formation
- In case of oily substrates, the primer must be worked in thoroughly
- The primer must fill all pores and cavities/voids
- It is not necessary to scatter oven-dried quartz sand onto the primer if it is coated within 24 hours

Scratch- and leveling primer

- Fill the material with oven-dried quartz sand, mix homogenously and distribute on the surface by flat trowel, scraper or rubber squeegee immediately after mixing
- When working on sloping or vertical surfaces the material can be additionally rendered thixotropic by adding a set-up agent (**WEBAC® ST200/300**)
- If necessary, vent the installation and leveling finish with a porcupine roller and scatter with oven-dried quartz sand

Final work and cleaning

- Clean the equipment with **WEBAC® Cleaner A**
- Never use **WEBAC® Cleaner A** for diluting products; avoid mixing with the primer
- Use **WEBAC® Cleaner B** for dissolving cured material
- Observe the technical data sheets of the cleaners used

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Epoxy Coating Systems – Primers

WEBAC® 4270E CE

WEBAC®

Product data

	Comp. A	Comp. B
Delivery form	16.85 kg	4.75 kg
	10 kg	2.8 kg
	3 kg	0.85 kg
Storage	<ul style="list-style-type: none">• Between 5 °C and 30 °C• Protected from moisture• In original, sealed containers	
Compatibility	<ul style="list-style-type: none">• Compatible with masonry mortar, concrete, steel, foil, cable sheathing, metal and WEBAC injection materials	
Resistance	<ul style="list-style-type: none">• Resistant to diluted acids and alkalis, lubricants, oil and fuels	

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interzero Circular Solutions Germany GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Disposal Notes" in our product catalog or www.webac.com and the safety data sheets.

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 05/2026